

64M X 64 Bits (512MB) 144-Pin Unbuffered SDRAM SO-DIMM (PC133) 2 Rank x 8

FEATURES

- PC133 Compliant
(CL Designator A: tCYC = 7.5ns@CL = 3)
(CL Designator D: tCYC = 7.5ns@CL = 2, 3)
- Burst Mode Operation
- Auto and self refresh capability
(8192 cycles/64ms refresh)
- LVTTTL compatible inputs and outputs
- +3.3V ± 0.3V power supply
- MRS cycle with address key programs
 - Latency (access from column address)
 - Burst Length (1, 2, 4, 8, and full page)
 - Data scramble (sequential and interleave)
- All inputs are sampled at the positive going edge of the system clock
- Serial Presence Detect with EEPROM
- RoHS Compliant, lead-free version available

GENERAL DESCRIPTION

The SL64G8F64M8G-C75xV(U) is a 64M x 64 bit Synchronous Dynamic RAM (SDRAM) Unbuffered Small Outline Dual In-line Memory Module (SO-DIMM).

The module consists of sixteen 8M x 8 bit x 4 bank SDRAMs in BGA packages mounted on a 144-pin glass epoxy substrate and organized in 2 ranks.

A serial EEPROM using the two pin I²C protocol is also mounted to provide for the Serial Presence Detects (SPD). Decoupling capacitors are mounted across the power supply. Damping resistors are mounted in series on the data lines. A PLL supplies clocks to the SDRAM from one clock input.

The module has gold edge connections and is intended for mounting into 144-pin SO-DIMM edge connector sockets keyed for 3.3V.

See *Ordering Information* for PC133 performance options.


ORDERING INFORMATION

Part Number	tCYC	CL	tRCD	tRP	tRC
SL64G8F64M8G-C75AV(U)	7.5ns	3clks	20ns	20ns	66ns
SL64G8F64M8G-C75DV(U)	7.5ns	2clks	15ns	15ns	60ns

Note: The "U" suffix added to the part number selects the RoHS Compliant, lead-free version.

PACKAGE DIMENSIONS

Units are in inches. Tolerances are ±0.005 unless otherwise specified.

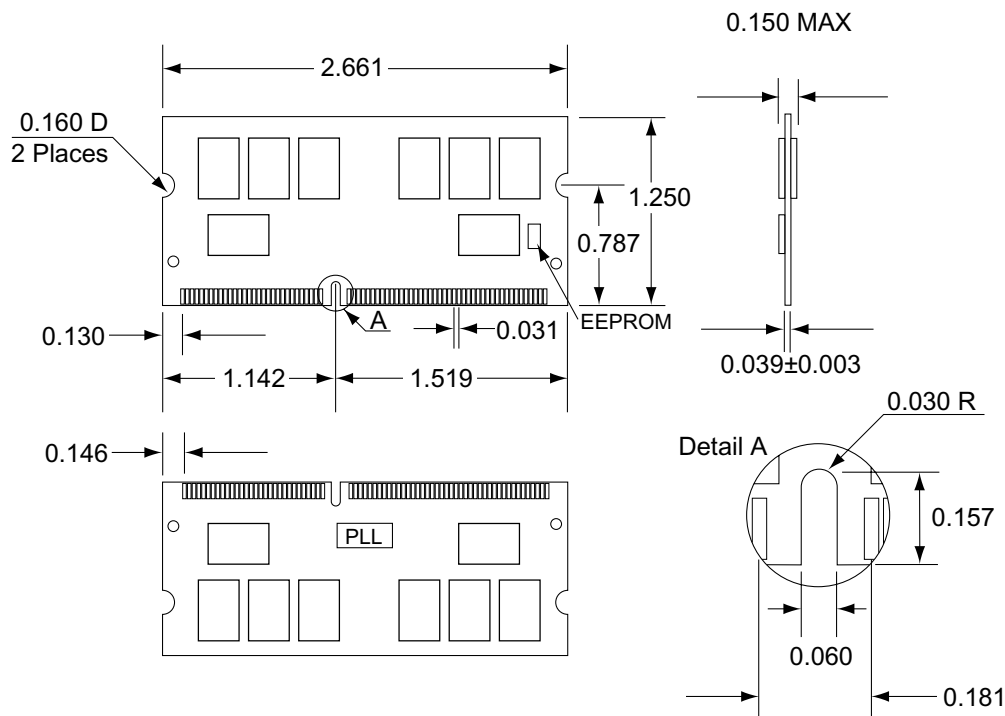

(Where **x** = CL Designator; **U** = RoHS Compliant, lead-free version.)


PIN CONFIGURATION

Pin Symbols

Pin	Symbol	Pin	Symbol	Pin	Symbol	Pin	Symbol	Pin	Symbol	Pin	Symbol	Pin	Symbol	Pin	Symbol
1	VSS	21	VSS	41	DQ10	61	CLK0	81	VDD	101	VDD	121	DQ24	141	SDA
2	VSS	22	VSS	42	DQ42	62	CKE0	82	VDD	102	VDD	122	DQ56	142	SCL
3	DQ0	23	DQMB0	43	DQ11	63	VDD	83	DQ16	103	A6	123	DQ25	143	VDD
4	DQ32	24	DQMB4	44	DQ43	64	VDD	84	DQ48	104	A7	124	DQ57	144	VDD
5	DQ1	25	DQMB1	45	VDD	65	$\overline{\text{RAS}}$	85	DQ17	105	A8	125	DQ26		
6	DQ33	26	DQMB5	46	VDD	66	$\overline{\text{CAS}}$	86	DQ49	106	BA0	126	DQ58		
7	DQ2	27	VDD	47	DQ12	67	$\overline{\text{WE}}$	87	DQ18	107	VSS	127	DQ27		
8	DQ34	28	VDD	48	DQ44	68	CKE1	88	DQ50	108	VSS	128	DQ59		
9	DQ3	29	A0	49	DQ13	69	$\overline{\text{S}}_0$	89	DQ19	109	A9	129	VDD		
10	DQ35	30	A3	50	DQ45	70	A12	90	DQ51	110	BA1	130	VDD		
11	VDD	31	A1	51	DQ14	71	$\overline{\text{S}}_1$	91	VSS	111	A10/AP	131	DQ28		
12	VDD	32	A4	52	DQ46	72	A13*	92	VSS	112	A11	132	DQ60		
13	DQ4	33	A2	53	DQ15	73	NC	93	DQ20	113	VDD	133	DQ29		
14	DQ36	34	A5	54	DQ47	74	CLK1*	94	DQ52	114	VDD	134	DQ61		
15	DQ5	35	VSS	55	VSS	75	VSS	95	DQ21	115	DQMB2	135	DQ30		
16	DQ37	36	VSS	56	VSS	76	VSS	96	DQ53	116	DQMB6	136	DQ62		
17	DQ6	37	DQ8	57	CB0*	77	CB2*	97	DQ22	117	DQMB3	137	DQ31		
18	DQ38	38	DQ40	58	CB4*	78	CB6*	98	DQ54	118	DQMB7	138	DQ63		
19	DQ7	39	DQ9	59	CB1*	79	CB3*	99	DQ23	119	VSS	139	VSS		
20	DQ39	40	DQ41	60	CB5*	80	CB7*	100	DQ55	120	VSS	140	VSS		

* Not used

Pin Arrangement

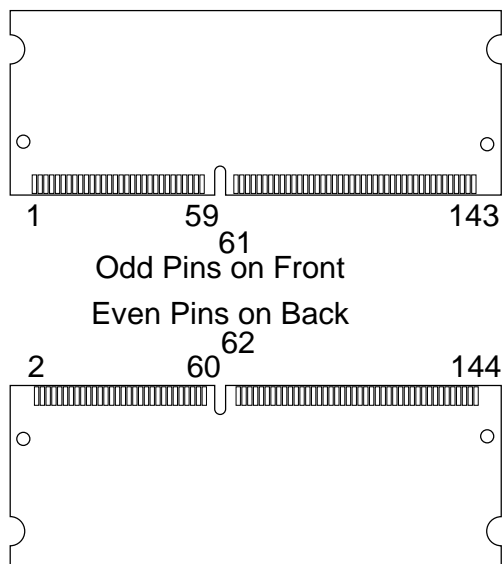


Pin Functions

Pin Name	Pin Function
A0-A10/AP, A11, A12	Address Inputs (multiplexed)
BA0, BA1	Select Bank
DQ0-DQ63	Data In/Out
$\overline{\text{WE}}$	Read/Write Enable
CLK0	Clock Input
CKE0, CKE1	Clock Enable Input
$\overline{\text{RAS}}$	Row Address Strobe
$\overline{\text{CAS}}$	Column Address Strobe
DQMB0-DQMB7	Data Input/Output Mask
$\overline{\text{S}}_0, \overline{\text{S}}_1$	Chip Select Input
SDA	Serial Data I/O
SCL	Serial Clock
VDD	Power (+3.3V)
VSS	Ground
NC	No Connection

(Where **x** = CL Designator; **U** = RoHS Compliant, lead-free version.)

FUNCTIONAL BLOCK DIAGRAM

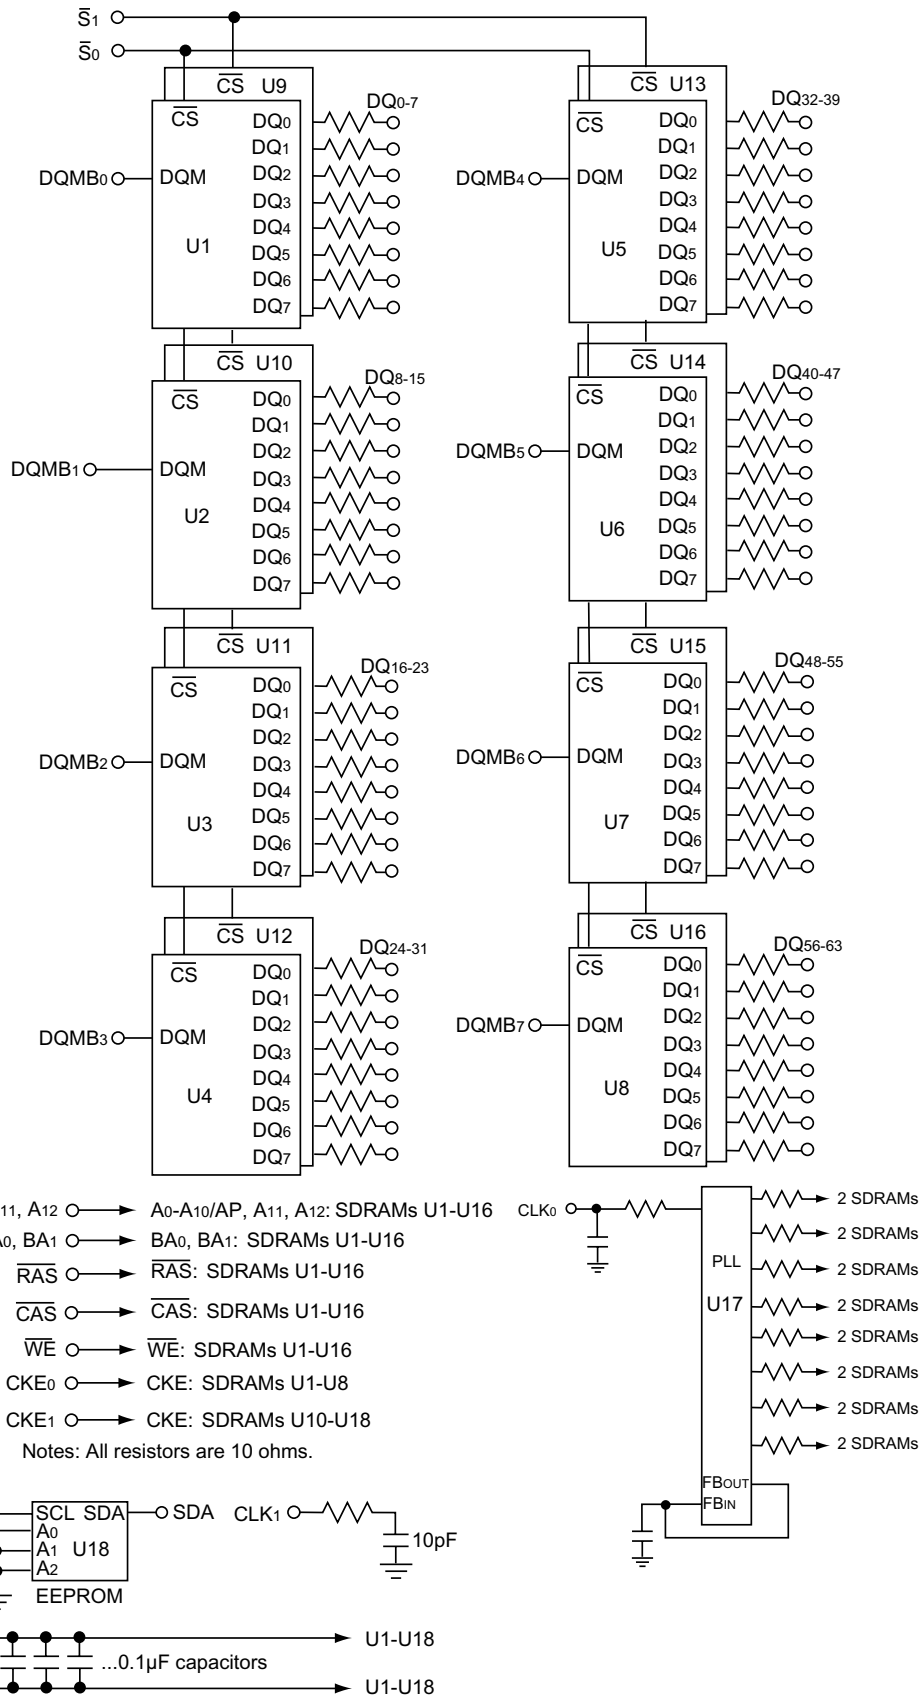

(Where **x** = CL Designator; **U** = RoHS Compliant, lead-free version.)**SERIAL PRESENCE DETECT INFORMATION**Serial PD Interface Protocol: I²C; Current sink capability of SDA driver <=3mA; Maximum clock frequency: 100 KHz

Byte #	Function Described	Function Supported	Hex Value
0	# of bytes written into serial memory at module manufacturer	128 bytes	80h
1	Total # of bytes of SPD memory device	256Bytes (2K-bit)	08h
2	Fundamental memory type	SDRAM	04h
3	# of row addresses on this assembly	13	0Dh
4	# of column addresses on this assembly	10	0Ah
5	# of module ranks on this assembly	2 ranks	02h
6	Data width of this assembly	64 bits	40h
7	...Data width of this assembly (continued)	—	00h
8	Voltage interface standard of this assembly	LVTTTL	01h
9	SDRAM cycle time at CL=3 (tCYC)	7.5ns	75h
10	SDRAM access time from clock at CL=3 (tAC)	5.4ns	54h
11	DIMM configuration type	non-ECC	00h
12	Refresh rate/type	7.8µs, Self-refresh	82h
13	SDRAM width	8 bits	08h
14	Error Checking DRAM data width	none	00h
15	Min. CLK delay for back-to-back rand. col. addr.	tCCD=1 CLK	01h
16	SDRAM device attributes: burst lengths supported	1,2,4,8, and full page	8Fh
17	SDRAM device attributes: # of banks on SDRAM device	4 banks	04h
18	SDRAM device attributes: CAS latency	CAS latency = 2,3	06h
19	SDRAM device attributes: CS latency	CS latency = 0	01h
20	SDRAM device attributes: Write latency	Write Latency = 0	01h
21	SDRAM module attributes	non-buff., non-reg., PLL	04h
22	SDRAM device attributes: general	VCC10%, B/R, S/W, P/A, A/P	0Eh
23	Minimum clock cycle time at CL=2 (tCYC)	10ns (CL Designator A) 7.5ns (CL Designator D)	A0h 75h
24	Max. data access time form clock at CL=2 (tAC)	6ns (CL Designator A) 5.4ns (CL Designator D)	60h 54h
25	Minimum clock cycle time at CL=1 (tCYC)	—	00h
26	Max. data access time from clock at CL=1 (tAC)	—	00h
27	Minimum row precharge time (tRP)	20ns	14h
28	Minimum row active to row active delay (tRRD)	15ns	0Fh
29	Minumum RAS to CAS (tRCD)	20ns	14h
30	Minumum RAS pulse width (tRAS)	45ns	2Dh
31	Module bank density	256MB	40h
32	Min. command and address signal setup time (tAS)	1.5ns	15h
33	Min. command and address signal hold time (tAH)	0.8ns	08h
34	Min. data signal input setup time (tDS)	1.5ns	15h

(Serial Presence Detect Information continued on the next page)

(Where **x** = CL Designator; **U** = RoHS Compliant, lead-free version.)

SERIAL PRESENCE DETECT INFORMATION *(continued)*

Byte #	Function Described	Function Supported	Hex Value
35	Min. data signal input hold time (t _{DH})	0.8ns	08h
36-61	Superset information (may be used in future)	—	00h
62	SPD revision	1.2	12h
63	Checksum for bytes 0-62	JEDEC calculation	xxh
64	Manufacturer's JEDEC ID code per JEP-106E	Continuation code	7Fh
65	Man. JEDEC ID code (continued)	STEC's ID	A8h
66-71			00h
72	Manufacturing location	STEC USA	xxh
73-90	Manufacturer's part number		xxh
91	Revision code of PCB	RevA(01),RevB(02)	xxh
92			00h
93	Manufacturing date	Year (BCD)	yy
94		Calender Week (BCD)	w w
95	Assembly serial number	Tester number	ss
96		Serial number (bits 7-0)	ss
97		Serial number (bits 15-8)	ss
98		Serial number (bits 23-16)	ss
99-125	Manufacturer's specific data		xxh
126	Intel specification frequency	100MHz	64h
127	Intel specification details	CLK0; junc temp.TBD; CL2,CL3; concurrent AP	8Fh
128+	—		00h

(Where **x** = CL Designator; **U** = RoHS Compliant, lead-free version.)

ABSOLUTE MAXIMUM RATINGS¹

Item	Symbol	Rating	Units
Voltage on Any Pin Relative to VSS	V _{IN} , V _{OUT}	-1.0 to +4.6	V
Voltage on VCC Supply Relative to VSS	V _{DD}	-1.0 to +4.6	V
Storage Temperature	T _{stg}	-55 to +150	°C
Power Dissipation	P _D	16	W
Short Circuit Output Current	I _{OS}	50	mA

1. Permanent device damage may occur if "ABSOLUTE MAXIMUM RATINGS" are exceeded. Functional Operation should be restricted to the conditions as detailed in the operational sections of this data sheet. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

RECOMMENDED OPERATING CONDITIONS (Voltage reference to VSS=0)

Item	Symbol	Min	Typ	Max	Unit	Notes
Commercial Operating Temperature Range	T _A	0	25	70	°C	
Supply Voltage	V _{DD}	3.0	3.3	3.6	V	
Input High Voltage	V _{IH}	2.0	3.0	V _{DD} +0.3	V	1
Input Low Voltage	V _{IL}	-0.3	0	0.8	V	2
Output High Voltage Level	V _{OH}	2.4	—	—	V	I _{OH} = -4mA
Output Low Voltage Level	V _{OL}	—	—	0.4	V	I _{OL} =4mA
Input Leakage Current	I _{IL}	-80	—	80	μA	3
Output Leakage Current	I _{OL}	-10	—	10		3, 4

1. V_{IH}(max)=5.6 V AC (pulse width <=3 ns acceptable).
2. V_{IL}(min) = -2.0 V AC (pulse width <=3 ns acceptable).
3. Any input 0<=V_{IN}<=V_{DD}.
4. Data out is disabled, 0<=V_{OUT}<=V_{DD}.

CAPACITANCE (T_A=25°C, V_{DD}=3.3V, f=1MHz, V_{REF}=1.4±200mA)

Item	Symbol	Max	Units
Input Capacitance (A, BA, RAS, CAS, WE) 20pF adder for board.	C _{IN1}	80.8	pF
Input Capacitance (CKE, S) 20pF adder for board.	C _{IN3}	50.4	pF
Input Capacitance (CLK) PLL input. 5pF adder for board.	C _{IN2}	7.5	pF
Input Capacitance (DQMB) 5pF adder for board.	C _{IN4}	12.6	pF
Input/Output Capacitance (DQ) 5pF adder for board.	C _{IO1}	17	pF

*(Where x = CL Designator; U = RoHS Compliant, lead-free version.)***DC CHARACTERISTICS**

Recommended operating conditions unless otherwise noted.

Parameter/Condition	Symbol	CL Designator D (Max)	CL Designator A (Max)	Units	Notes
OPERATING CURRENT: Active Mode; Burst = 2; READ or WRITE; tRC >= tRC (MIN)	IDD1	1,096	1,016	mA	1,3,4,5,6
STANDBY CURRENT: Power-Down Mode; All banks idle; CKE = LOW	IDD2	32	32	mA	5
STANDBY CURRENT: Active Mode; CKE = HIGH; CS = HIGH; All banks active after tRCD met; No accesses in progress	IDD3	640	640	mA	1,2,4,5,6
OPERATING CURRENT: Burst Mode; Continuous burst; READ or WRITE; All banks active	IDD4	1,096	1,096	mA	1,3,4,5,6
AUTO REFRESH CURRENT: tRFC = tRFC (MIN) CKE = HIGH; CS = HIGH	IDD5	2,296	2,176	mA	1,2,3,4,5,6
SELF REFRESH CURRENT: Standard CKE <= 0.2V	IDD7	40	40	mA	

1. IDD is dependent on output loading and cycle rates. Specified values are obtained with minimum cycle time and the outputs open.
2. Other input signals are allowed to transition no more than once every two clocks and are otherwise at valid VIH or VIL levels.
3. The IDD current will increase or decrease proportionally according to the amount of frequency alteration for the test condition.
4. Address transitions average one transition every two clocks.
5. For CL Designator D, CL=2 and tCK=7.5ns. For CL Designator A, CL=3 and tCK=7.5ns.
6. For modules with more than one rank, IDDn is specified with one rank in IDDn and the other ranks in IDD2, where n is IDD number in the Symbol column.

AC TIMING PARAMETERS (Recommended operating conditions unless otherwise specified.)

Parameter	Symbol	CL Designator A		CL Designator D		Unit	Notes	
		Min	Max	Min	Max			
Clock Period	CL3 CL2	t _{CLK}	7.5		7.5		ns	
			10		7.5		ns	
Clock High Time (Rated @1.5V)		t _{CH}	2.5		2.5		ns	
Clock Low Time		t _{CL}	2.5		2.5		ns	
Input Setup Times (Data) (Address/Command & CKE)		t _{SI}	1.5		1.5		ns	
			1.5		1.5			
Input Hold Times (Data) (Address/Command & CKE)		t _{HI}	0.8		0.8		ns	
			0.8		0.8			
Output Valid From Clock (LVTTL levels; Rated@50pF; all outputsswitching)	CL3 CL2	t _{AC}		5.4 6		5.4 5.4	ns ns	1 1
					2.7		ns	
Output Hold From Clock (Rated@50pF)		t _{OH}	2.7		2.7		ns	
CAS to CAS Delay		t _{CCD}	1		1		t _{CLK}	
CKE to Clock Disable		t _{CKE}	1		1		t _{CLK}	
RAS Precharge Time		t _{RP}	20		15		ns	
RAS Active Time		t _{RAS}	45	120K	45	120K	ns	
Active to Command Delay (RAS to CAS Delay)		t _{RCD}	20		15		ns	
RAS to RAS Bank Activate Delay		t _{RRD}	15		15		ns	
RAS Cycle Time		t _{RC}	66		60		ns	
DQM to Input Data Delay		t _{DQD}	0		0		t _{CLK}	
Write Cmd. to Input Data Delay		t _{DWD}	0		0		t _{CLK}	
Mode Register Set to Active Delay		t _{MRD}	2		2		t _{CLK}	
Precharge to O/P in High-Z		t _{ROH}		CL		CL	t _{CLK}	2
DQM to Data in Hi-Z for Read		t _{DQZ}	2		2		t _{CLK}	
DQM to Data Mask for Write		t _{DQM}	0		0		t _{CLK}	3
Data-In to PRE Command Period		t _{DPL}	2		2		t _{CLK}	
Data-In to ACT (PRE) Cmd Period (Auto Precharge)		t _{DAL}	4		5		t _{CLK}	
Power Down Mode Entry		t _{SB}		1		1	t _{CLK}	
Exti Self Refresh to Active Time		t _{XSR}	75		67		ns	
Power Down Exit Set Up Time		t _{PDE}	1		1		t _{CLK}	4
Clock Stop During Self Refresh or Power Down		t _{CLKSTP}	200		200		t _{CLK}	5
Refresh Period		t _{REF}		64		64	ms	6

- Access times to be measured with input signals of 1V/ns edge rate, 0.8V to 2.0V. t_{ACN}=access time with 0pF load.
- CL=CAS Latency.
- Data Masked on the same clock.
- Timing is asynchronous. If t_{set} is not met by rising edge of CLK then CKE is assumed latched on next cycle.
- If the clock is stopped during self refresh or power down, 200 clocks are required before CKE is high.
- For 64Mbit and 128Mbit SDRAM technology, 4096 refresh cycles. For 256Mbit and 512Mbit technology, 8192 refresh cycles.

REVISION HISTORY

Rev. Change Description from Previous Revision

- 101 10/16/2006. Initial release. This board is has commercial operating temperature range only.
- 102 08/08/2007. Updated logo, web address and SPD.

DISCLAIMER OF LIABILITY

STEC™ Inc. reserves the right to make changes to specifications and product descriptions such as but not limited to numbers, parameters and other technical information contained herein without notice. Please contact the STEC™ Inc. sales office to obtain the latest specifications. STEC™ Inc. grants no warranty with respect to this datasheet, neither explicit or implied, and is not liable for direct or indirect damages. Some states do not grant the exclusion of incidental damages and as such this statement may not be valid in such states. The provisions of the datasheet do not convey to the purchaser of the device any license under any patent rights or other intellectual property rights of STEC Inc. or others.

EXPORT ADMINISTRATION REGULATIONS

The information provided may be subject to United States Export Controls. Such information should not be downloaded or exported (i), into (or to a national or resident of) Cuba, Iraq, Libya, North Korea, Iran, Syria, or any other country to which the United States has embargoed goods; or given to (ii), anyone on the United States Treasury Department's list of Specially Designated Nationals or the U.S. Commerce Department's Table of Deny Orders. By using the information, you represent and warrant that you are not located in, under the control of, or a national or resident of any such country or on any such list.

COPYRIGHT NOTICE

Copyright © 2007 by STEC™ Inc. All rights reserved. Information contained in this document, including but not limited to any instructions, descriptions and product specifications, is considered proprietary and confidential to STEC™, Inc. and shall not be modified, used, copied, reproduced or disclosed in whole or in part, in any form or by any means, electronic or mechanical, for any purpose, without the written consent of STEC™ Inc.

